Since 1989!
662 US Hwy 12 and 18, Cambridge, WI 53523
608-423-4241
wisconsinpavilions.com

# 20' x 24' (D) Pavilion Specs and Pricing (Arched Braces)

**Years of building outdoor kitchens, living rooms, patios, ponds, waterfalls, decorative seat walls, built in grills, fire surrounds and many other outdoor living amenities have taught us what works, what is practical and what people utilize. And most important, what is cost effective. The one thing that was limiting for people to take full advantage of their outdoor living spaces was a way to shelter the area without taking away the openness of the outdoors or disrupting the harmony with nature. The solution; A beautifully designed Wisconsin Pavilion with the option of convertible screens and a huge list of customizable amenities to fit individual lifestyles.**

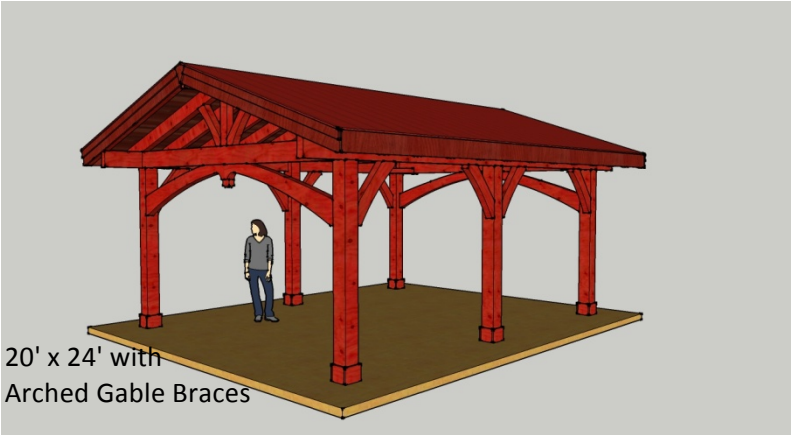

20' x 24' with Arched Gable Braces

## Specs:

- All full dimensional lumber in Rough Sawn White Pine
- Aerial footprint = 20'x24' with overhang (24" overhang)
- Net size post to post = 16'x20' (6 massive posts 8x8 solid)
- Full 3x10x24' ridge beam
- Full 5x10x24' main beams, Full 4x10 gable end collar, 4x8 King Post and curved V-Braces
- Full 3x8 rafters with 2 - 8x8 collar ties
- Full 4x12 arch cut gable braces and curved post braces
- Tongue and Groove R.S. Western Red Cedar ceiling prefinished both sides
- Western Red cedar fascia and step fascia pre finished both sides
- Continental Weather Seal Finish on all exposed wood surfaces
- 4/12 pitch standard - custom pitch upgrades available
- 30 year Landmark Architectural shingle asphalt roof with Ice and water shield underlayment
- 5/8" roof sheeting over 3/4" T&G Western Red Cedar finished ceiling (prefinished both sides)
- 16" x 4' concrete reinforced foundation piers
- Welded steel standoff pier to post anchors

*Numerous outdoor living options available (only limited by your imagination):*

*Full convertible screens, metal roof, patios, paver inlays, walls, borders, accents, elements, fireplaces, custom bars, wood fired pizza and bread ovens, fire pits, LED lighting, ceiling fans, television(s), landscaping and much more!*

**Not Included due to extensive options available:**

Excavating/grading, access or access repairs, mechanicals, patio materials/labor.
Base Concrete patio slab 20'x24' starting at $2500.00 base material, slab and labor included.

UNILOCK Authorized Contractor
CERTIFIED ICPI INSTALLER
ROCKWOOD RETAINING WALLS A better way.
WLCA Member Wisconsin Landscape Contractors